


ALV2 (ALVB) series/ Peripherals

Elevator Card Reader

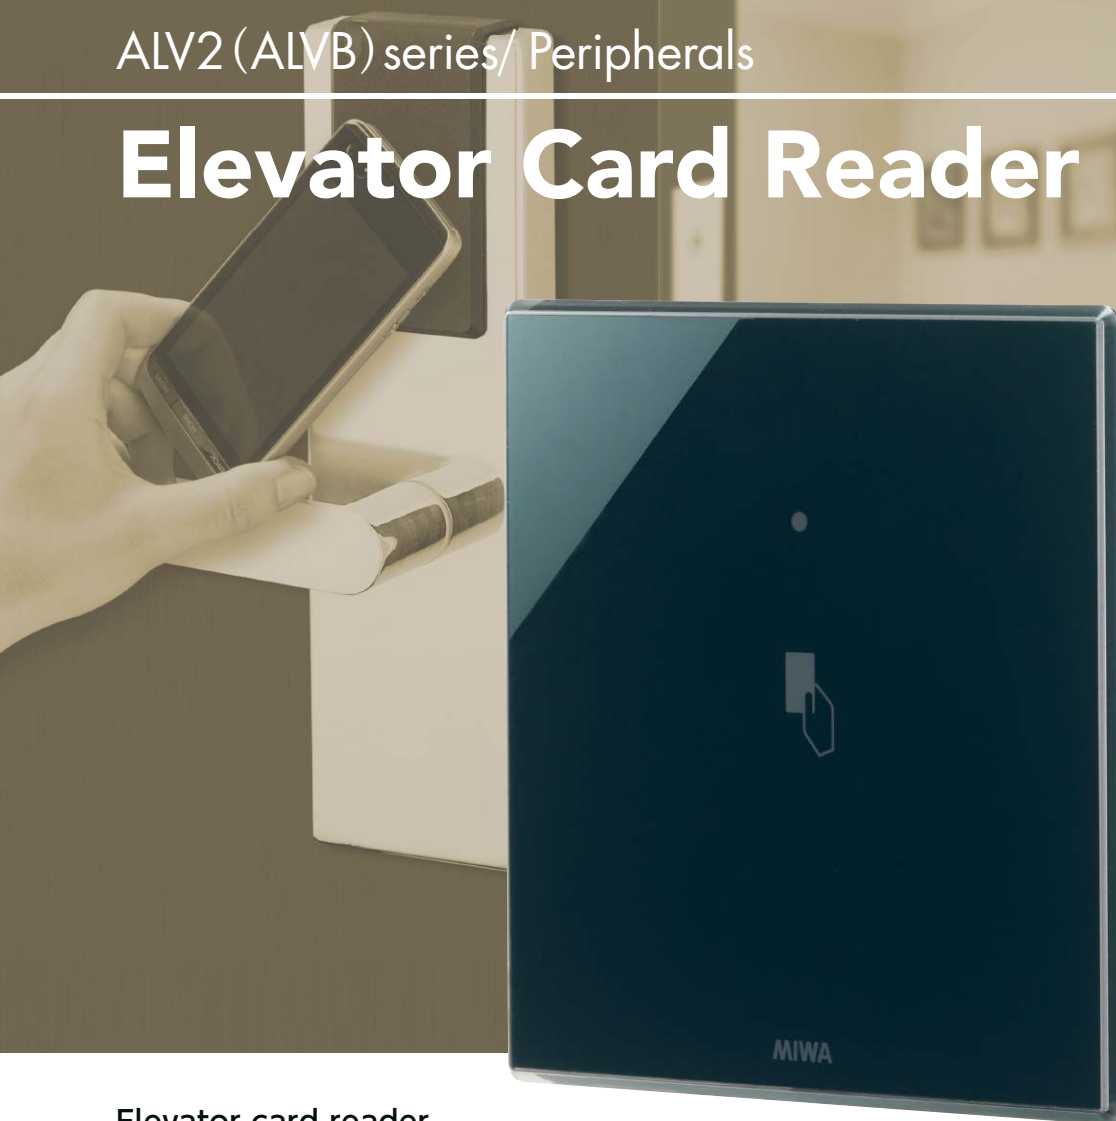

Elevator card reader RDFL-B03H/RDFL-B03BLE

- Only the guests with a valid card keycard will have access to the elevators / floors.
- Reader is designed to be built into elevator panel.
- Up to 40 contacts relays available.
- Up to 4 card readers can be operable under one controller.
- ALVB Available with Mobile key option.

MIWA LOCK CO., LTD.

JAPAN 3-1-12, Shiba, Minato-ku, Tokyo 105-8510
TEL: +81-3-3452-5568 FAX: +81-3-3452-5911 URL: www.miwa-lock.biz

U.S.A 9272 Jeronimo, Suite 119, Irvine CA 92618
TEL: +1-949-328-5280 / Toll free: +1-888-412-9750 FAX: +1-949-328-5281 URL: www.miwalock.com

Specifications


Elevator card reader

External dimensions	W116mm× H120mm× D45mm
Weight	250g
Power supply	Supplied from controller
Environmental condition	-5℃~+50℃/20~90%RH (No condensation)

Elevator reader controller

External dimensions	W374mm × H314mm × D115mm
Weight	6kg (without back-up battery)
Power supply	AC100V ~ 240V ± 10%
Power consumption	75VA
Output	Normal open or close contact Max 40 relays
Duration of contact	1 ~ 59 sec. adjustable
Contact capacity	DC30V / 2A · AC250V / 2A
Environmental condition	Internal installation only 0℃~+50℃/20~80%RH (No condensation)

Diagram

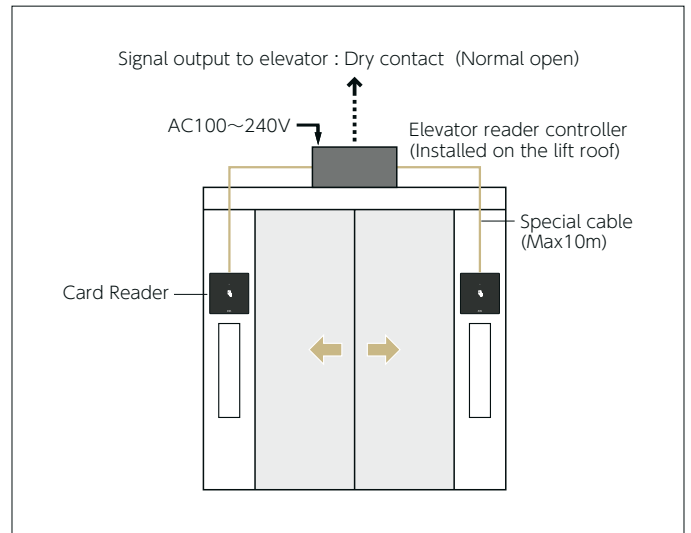

Detail Drawing

CMHL-401/402/403/404

RDFL-B03H/RDFL-B03BLE

